

06-20-00

A

jc862 U.S. PTO  
-06/19/00

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> <small>(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))</small>	Attorney Docket No. SCF-58
	First Inventor or Application Identifier JERRY C. ANDERSON
	Title AIRCRAFT INSULATION
	Express Mail Label No. EL471680280US

<b>APPLICATION ELEMENTS</b> See MPEP chapter 600 concerning utility patent application contents.	<b>ADDRESS TO:</b> Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing) 2. <input checked="" type="checkbox"/> Specification [Total Pages 15] - Descriptive title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure 3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 2] 4. Oath or Declaration [Total Pages ] a. <input type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed) i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	5. <input type="checkbox"/> Microfiche Computer Program (Appendix) 6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies <b>ACCOMPANYING APPLICATION PARTS</b> 7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. §3.73(b) Statement of Power of Attorney (when there is an assignee) 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 Copies of IDS Citations 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) * Small Entity 13. <input type="checkbox"/> Statement(s) filed in prior application, (PTO/SB/09-12) Status still proper and desired 14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 15. <input checked="" type="checkbox"/> Other: EXPRESS MAIL CERTIFICATE

\* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment.  
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_  
 Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

### 17. CORRESPONDENCE ADDRESS

<input type="checkbox"/> Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here)		<input type="checkbox"/> Correspondence address below	
Name	JASON W. JOHNSTON		
Address	DORITY & MANNING P.O. BOX 1449		
City	GREENVILLE	State	SC
Country	USA	Zip Code	29602-1449
Telephone	864 271 1592	Fax	864 233 7342

Name (Print/Type)	JASON W. JOHNSTON	Registration No. (Attorney/Agent)	45,675
Signature	<i>[Signature]</i>	Date	6/19/00

Burden Hour Statement. This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

EXPRESS MAIL CERTIFICATE OF MAILING



In re Application of: Jerry C. Anderson

Serial No.: Not yet assigned

Filed: Herewith

Entitled: Aircraft Insulation

Our Ref.: SCF-58

"Express Mail" - Mailing Label Number EL471680280US

Date of Deposit 6/19/00

I hereby certify that this paper and all attachments and any fee are being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Assistant Commissioner for Patents, Box Utility Patent Application, Washington D.C. 20231.

Yolande Kennedy

(Typed or printed name of person mailing paper or fee)



(Signature of person mailing paper or fee)

**PATENT**

**ATTORNEY DOCKET NO.: SCF-58**

UNITED STATES PATENT APPLICATION

**FOR**

## AIRCRAFT INSULATION

BY

**JERRY C. ANDERSON**

Case	Age	Sex	Duration	Site	Histology	Immunohistochemistry	Molecular biology	Outcome	Comments
1	45	F	10 years	Rectum	Adenocarcinoma	CK20+, CK7+	HER2/neu+	CR	Long-term survival
2	60	M	5 years	Colon	Adenocarcinoma	CK20+, CK7+	HER2/neu-	CR	Long-term survival
3	55	F	8 years	Rectum	Adenocarcinoma	CK20+, CK7+	HER2/neu+	CR	Long-term survival
4	70	M	12 years	Colon	Adenocarcinoma	CK20+, CK7+	HER2/neu-	CR	Long-term survival
5	40	F	3 years	Rectum	Adenocarcinoma	CK20+, CK7+	HER2/neu+	CR	Long-term survival
6	65	M	7 years	Colon	Adenocarcinoma	CK20+, CK7+	HER2/neu-	CR	Long-term survival
7	50	F	6 years	Rectum	Adenocarcinoma	CK20+, CK7+	HER2/neu+	CR	Long-term survival
8	68	M	9 years	Colon	Adenocarcinoma	CK20+, CK7+	HER2/neu-	CR	Long-term survival
9	52	F	4 years	Rectum	Adenocarcinoma	CK20+, CK7+	HER2/neu+	CR	Long-term survival
10	72	M	11 years	Colon	Adenocarcinoma	CK20+, CK7+	HER2/neu-	CR	Long-term survival

**AIRCRAFT INSULATION**

**Background of the Invention**

5           Various types of aircraft, such as commercial passenger airline jets, can experience large temperature differentials between the inside and the outside of the fuselage. Moreover, the inside of aircraft can also experience enhanced noise levels due to various factors, such as wind and aircraft vibrations. As such, most aircraft currently employ  
10           “insulation blankets” to moderate the interior temperature of the aircraft and provide noise insulation. These insulation blankets generally provide thermal and acoustic insulation and are placed into the air space or cavity between the fuselage skin panels and the interior panels.

          One problem with some conventional insulation blankets,  
15           however, is moisture intake. For example, moisture can become entrapped within the insulation blanket and condense when colder temperatures are attained. The presence of water within the insulation blanket can undesirably increase the weight of the aircraft, while also reducing the thermal and acoustic performance as well.

20           In response to these problems, some insulation blankets were developed with a moisture barrier to allow vapors to flow through the blanket. For instance, nylon scrims are currently used as the moisture barrier for many insulation blankets. However, the moisture barriers of these insulation blankets are not generally flame retardant, and thus, will  
25           readily burn when contacted with fire. Moreover, many of these insulation blankets also do not provide sufficient noise or thermal insulation.

          As such, a need currently exists for an insulation blanket for use in aircraft. In particular, a need exists for an insulation blanket for  
30           providing thermal and noise insulation that is flame-retardant and vapor-

permeable.

### **Summary of the Invention**

The present invention recognizes and addresses the foregoing disadvantages, and others of prior art constructions and methods.

5 Accordingly, the present invention is generally directed to an insulation blanket that provides thermal and noise insulation to the cabin of an aircraft. In one embodiment, for example, the insulation blanket contains at least one barrier layer positioned adjacent to an insulation layer. An insulation layer of the present invention can generally be made from a variety of materials, such as fibrous or foam insulation materials. For instance, in one embodiment, the insulation layer is made from fiberglass.

10 As stated, an insulation blanket of the present invention also generally includes at least one barrier layer positioned adjacent to the insulation layer. In one particular embodiment, the insulation layer is sandwiched between two barrier layers to form the insulation blanket. In general, the barrier layer(s) of the present invention can be made from a film that is attached to a scrim according to any of a variety of methods, such as by stitching, adhesive bonding, taping, etc..

20 Typically, the film of the barrier layer(s) is a polymer film that is vapor-permeable so that moisture can flow through the insulation blanket. For instance, in one embodiment, the polymer film is made from aluminized "MYLAR", which is also generally flame-retardant. Moreover, the scrim attached to the film can also be made from any of a variety of generally flame-retardant materials. For instance, in one embodiment, the scrim of a barrier layer is made from yarns formed from a polyester filament produced by Kosa known as AVORA FR Type 692 FR Fiber. Moreover, the yarns forming the scrim of the barrier layer(s) are also generally textured. For instance, in one embodiment, the

textured yarns are formed using a false-twist texturizing process.

Generally, each strand of yarn can have a denier between about 70 and about 1,200, and particularly between about 100 to about 300. For instance, in one embodiment of the present invention, each strand of yarn made from AVORA FR fibers has a denier of about 150.

The yarn can then be woven into a scrim for use in accordance with the present invention. For example, the resulting scrim can have a variety of weaves, such as basket, twill, satin, plain, Leno, and the like. When utilized, the scrim can generally have any basis weight desired.

For instance, in some embodiments, the scrim can have a basis weight less than about 1 ounce per square yard (oz/yd<sup>2</sup>), and particularly between about 0.25 to about 0.45 oz/yd<sup>2</sup>. In one embodiment, for example, the scrim has a basis weight of about 0.38 oz/yd<sup>2</sup>.

An insulation blanket of the present invention can generally have any of a variety of desired sizes (e.g. length, width, thickness, etc.). For example, the length and/or width of the insulation blanket can vary depending on the dimensions of the aircraft. Moreover, the thickness of the insulation blanket can also vary. For instance, in some embodiments, the thickness of the insulation blanket can be between about 1 to about 4 inches.

Various features and aspects of the present invention are discussed in greater detail below.

### **Brief Description of the Drawings**

A full and enabling disclosure of the present invention, including the best mode thereof, to one of ordinary skill in the art, is set forth more particularly in the remainder of the specification, including reference to the accompanying figures, in which:

Fig. 1 is a perspective view of one example of an aircraft into which the insulation blankets of the present invention can be

incorporated;

Fig. 2 is a perspective view with cutaway portions of one embodiment of a fabric layer of the present invention; and

5 Fig. 3 is a perspective view with cutaway portions of one embodiment the insulation blanket of the present invention.

Repeat use of reference characters in the present specification and drawings is intended to represent same or analogous features or elements of the invention.

**Detailed Description of Representative Embodiments**

10 It is to be understood by one of ordinary skill in the art that the present discussion is a description of exemplary embodiments only, and is not intended as limiting the broader aspects of the present invention, which broader aspects are embodied in the exemplary construction.

In general, the present invention is directed to an insulation  
15 blanket for providing noise and thermal insulation to the inner cabin of an aircraft. In one embodiment, the insulation blanket is formed from an insulation layer sandwiched between two generally flame-retardant barrier layers. For instance, the barrier layers can, in some  
20 embodiments, be made from a generally flame-retardant polymer film that is laminated to a generally flame-retardant scrim.

Referring to Fig. 3, for example, one embodiment of an insulation blanket 12 is illustrated. In general, insulation blankets of the present invention can be used in a wide variety of other applications, such as in various types of aircraft. As shown in Fig. 1, for example, the insulation  
25 blanket 12 of the present invention can be utilized to insulate the passenger cabin of a commercial passenger aircraft 10. It should be understood, however, that other embodiments are also anticipated and are intended to be covered by this invention.

To insulate the cabin of an aircraft, an insulation blanket of the

present invention generally contains at least one layer of an insulation material. For example, as shown in Fig. 3, an insulation layer 14 made from fiberglass is depicted. Besides fiberglass, however, it should be understood that the insulation layer 14 may also be made from any of a variety of other insulation materials, such as described in U.S. Patent No. 5,759,659 to Sanocki, et al., which is incorporated herein in its entirety by reference thereto. For instance, the insulation layer 14 may include fibrous insulation, foam insulation, or combinations thereof. Some suitable fibrous insulation materials can include, but are not limited to, fiberglass, polymer fibers (e.g., polypropylene fibers), chopped glass fibers (e.g., magnesium aluminosilicate glass fibers), ceramic oxide fibers (e.g., aluminosilicate ceramic fibers, aluminoborosilicate ceramic oxide fibers, and alumina ceramic oxide fibers), and the like.

In addition to an insulation layer, an insulator blanket of the present invention also includes at least one barrier layer. For instance referring to Figs. 2-3, the insulation blanket 12 can include a barrier layer 16. In some embodiments, as shown in Fig. 3, the insulation blanket 12 can also include a barrier layer 18 so that the insulation layer 14 is sandwiched between the barrier layer 18 and the barrier layer 16.

In general, the barrier layer(s) of the present invention can be made from any of a variety of generally flame-retardant materials. For instance, in one embodiment, the barrier layers 16 and 18 can contain a generally flame-retardant film 20 attached to a generally flame-retardant scrim 22. The scrim 22 can be attached to the film 20 by any method known in the art, such as by stitching, taping, or by use of an adhesive.

The film 20 can generally be formed from any generally flame-retardant material. Further, the film 20 is typically "vapor-permeable". As used herein, the term "vapor-permeable" generally refers to a



material that allows a vapor, such as water vapor, to pass therethrough.

The vapor-permeable films of the present invention are also typically

substantially impervious to a liquid. For instance, in one embodiment,

the film 20 is a polymer film, such as, aluminized "MYLAR" (i.e., a

5 polyester film) made from DuPont. In another embodiment, a polymer film known as "INSULFAB 210" and obtained from Facile Holdings, Inc., can be utilized. Other suitable materials for the film 20 are described in

U.S. Patent No. 5,759,659 to Sanocki, et al. Some examples of such

materials include, but are not limited to, halogenated polyolefins (e.g.,

10 chlorinated and brominated polyethylene), a rubber-toughened ethylene-propylene copolymer compounded with a flame-retardant agent, and the like. Other additives may also be blended with the polymer film, such as other flame-retardant agents, colorants, and melt processing aids.

As stated above, barrier layer(s) of the present invention also

15 include a scrim attached to the film. As used herein, "scrim" generally refers to an open-weave fabric. For instance, as shown in Figs. 2-3, the barrier layer 16 includes a scrim 22 attached to the film 20. Normally,

the scrim 22 is made from a generally flame-retardant material. More

particularly, in one embodiment of the present invention, the scrim 22 is

20 made from yarns formed from a polyester filament produced by Kosa

known as AVORA FR Type 692 FR Fiber. AVORA FR fibers are made

from a generally flame-retardant polyester that contains an organic phosphorus compound in the polyethylene terephthalate chain.

However, it should also be understood that other generally flame-

25 retardant yarns can be used to form the scrim 22.

The scrim 22 can generally be formed from flat yarns or textured

yarns. The inventor of the present invention, however, has discovered

that, in most instances, textured yarns are more suitable in forming the

insulation blanket. A variety of well-known methods can be employed to

produce various types of textured yarns. For example, textured yarns can be formed using air jets, edge crimping, false-twisting, gear crimping, knit-de-knit, stuffer boxes, etc.. In one particular embodiment, the yarns forming the scrim 22 are texturized using false-twist texturizing.

To produce the textured yarns for the scrim 22, the yarns are first generally unified. In particular, two strands of yarn made from continuous fiber filaments are unified by false-twist texturizing. False twist texturizing involves twisting the feeder yarn in the clockwise direction and subsequently twisting the feeder yarn in the counterclockwise direction. Furthermore, heat is applied to the feeder yarn during each twisting step to provide the yarn with memory, to heat-set the yarn, to draw the yarn, and to properly orient the molecular structure of the yarn. Generally, the amount of heat applied to the feeder yarn depends on the type of fiber used. Normally, it is desired that the temperature of the yarn not exceed its melting point. In one embodiment of the present invention, for example, the feeder yarn made from AVORA FR fibers can be heated to a temperature less than about 482°F., the melting point of the fibers.

Generally, each strand of yarn can have a denier between about 70 and about 1,200, and particularly between about 100 to about 300. For instance, in one embodiment of the present invention, each strand of yarn made from AVORA FR fibers has a denier of about 150.

After forming the yarns, they can then be woven into a scrim for use in accordance with the present invention. Any type of weave can generally be utilized in forming the scrim of the present invention. Some suitable types of weaves include, but are not limited to, basket, twill, satin, plain, Leno, and the like. For example, in one embodiment, the scrim is produced from 150-denier AVORA FR yarn with a Leno weave

having approximately 12 ends/inch x 6 picks/inch (length x width).

Moreover, after or before forming the scrim, the fabric can be scoured, although scouring may not be necessary for all applications. When utilized, scouring can partially stabilize the fabric by preventing residual shrinkage, as well as clean the fabric by removing water soluble lubricants used in yarn processing and manufacturing that could, in some instances, cause inadequate fire resistance. In addition, the fabric can also be placed on a tenter frame to be dried and heat-set.

Generally, heat-setting determines the finished width of the fabric by providing dimensional stability. Specifically, fabrics produced according to the present invention can be heat-set at a temperature between about 350°F and about 375°F for approximately one minute.

In general, a scrim formed in accordance with the present invention can be made with various basis weights in order to optimize the properties of the scrim for a particular application. For instance, in some embodiments, the scrim can have a basis weight less than about 1 ounce per square yard (oz/yd<sup>2</sup>), and particularly between about 0.25 to about 0.45 oz/yd<sup>2</sup>. In one embodiment, for example, the scrim has a basis weight of about 0.38 oz/yd<sup>2</sup>.

In accordance with the present invention, the insulation blanket, such as described above, can generally be formed to have any of a variety of desired sizes (e.g. length, width, thickness, etc.) and/or shapes. For example, the length and/or width of the insulation blanket can vary depending on the dimensions of the aircraft. Moreover, the thickness of the insulation blanket can also vary. For instance, in some embodiments, the thickness of the insulation blanket 12 can be between about 1 to about 4 inches. Once formed, the insulation blanket 12 can be installed into an aircraft in any manner desired. For example, attachment devices, such as described in U.S. Patent No. 5,811,167 to

Norvell, which is incorporated herein in its entirety by reference thereto, can be used in the present invention. For instance, devices, such as straps, that impale the insulation blanket and then attach to the airframe can be used. These attachment devices generally penetrate through the entire insulation blanket. Moreover, the blanket 12 can be installed into new aircraft, as well as being retrofitted to aircraft currently in use.

These and other modifications and variations to the present invention may be practiced by those of ordinary skill in the art, without departing from the spirit and scope of the present invention, which is more particularly set forth in the appended claims. In addition, it should be understood that aspects of the various embodiments may be interchanged both in whole or in part. Furthermore, those of ordinary skill in the art will appreciate that the foregoing description is by way of example only, and is not intended to limit the invention so further described in such appended claims.

**WHAT IS CLAIMED IS:**

1. An insulation blanket for providing thermal and noise insulation to the cabin of an aircraft, said insulation blanket comprising:

an insulation layer containing an insulation material; and

5 a barrier layer positioned adjacent to said insulation layer, said barrier layer containing a film attached to a scrim, said scrim being made from generally flame-retardant, textured yarns.

10 2. An insulation blanket as defined in claim 1, further comprising a second barrier layer positioned adjacent to said insulation layer so that said insulation layer is sandwiched between said barrier layer and said second barrier layer.

15 3. An insulation blanket as defined in claim 2, wherein said second barrier layer contains a film attached to a scrim, said scrim of said second barrier layer being made from generally flame-retardant, textured yarns.

4. An insulation blanket as defined in claim 1, wherein said textured yarns are formed from generally flame-retardant polyester fibers.

20 5. An insulation blanket as defined in claim 1, wherein said yarns have a denier of from about 70 to about 1,200.

6. An insulation blanket as defined in claim 1, wherein said yarns have a denier of from about 100 to about 300.

7. An insulation blanket as defined in claim 1, wherein said textured yarns are formed by false-twist texturizing.

25 8. An insulation blanket as defined in claim 1, wherein said scrim has a Leno weave.

9. An insulation blanket as defined in claim 1, wherein said scrim has a basis weight of less than about 1 ounce per square yard.

10. An insulation blanket as defined in claim 1, wherein said

scrim has a basis weight of from about 0.25 to about 0.45 ounces per square yard.

11. An insulation blanket as defined in claim 1, wherein said film is a polymer film.

5 12. An insulation blanket as defined in claim 11, wherein said film is a polyester film.

13. An n insulation blanket as defined in claim 1, wherein said film is vapor-permeable.

10 14. An insulation blanket as defined in claim 1, wherein said insulation material contains fiberglass.

15. An insulation blanket as defined in claim 1, wherein said blanket has a thickness between about 1 to about 4 inches.

16. An insulation blanket for providing thermal and noise insulation to the cabin of an aircraft, said insulation blanket comprising:  
15 a first barrier layer and a second barrier layer, said barrier layers containing a film attached to a scrim, said scrim being made from generally flame-retardant, textured yarns, said textured yarns having a denier of from about 70 to about 1,200; and

20 an insulation layer sandwiched between said first barrier layer and said second barrier layer, said insulation layer containing an insulation material.

17. An insulation blanket as defined in claim 16, wherein said textured yarns are formed from generally flame-retardant polyester fibers.

25 18. An insulation blanket as defined in claim 16, wherein said yarns have a denier of from about 100 to about 300.

19. An insulation blanket as defined in claim 16, wherein said scrim has a Leno weave.

20. An insulation blanket as defined in claim 16, wherein said

scrim has a basis weight of less than about 1 ounce per square yard.

21. An insulation blanket as defined in claim 16, wherein said scrim has a basis weight of from about 0.25 to about 0.45 ounces per square yard.

5           22. An insulation blanket as defined in claim 16, wherein said film is a polymer film.

23. An insulation blanket as defined in claim 22, wherein said film is a polyester film.

10           24. An n insulation blanket as defined in claim 16, wherein said film is vapor-permeable.

25. A barrier layer that is suitable for use in an aircraft insulation blanket, said barrier layer comprising:

a polymer film; and

15           a scrim attached to said polymer film, said scrim being made from generally flame-retardant, textured yarns, said textured yarns having a denier of from about 70 to about 1,200 and being formed from polyester fibers.

26. An insulation blanket as defined in claim 25, wherein said yarns have a denier of from about 100 to about 300.

20           27. An insulation blanket as defined in claim 25, wherein said textured yarns are formed by false-twist texturizing.

28. An insulation blanket as defined in claim 25, wherein said scrim has a Leno weave.

25           29. An insulation blanket as defined in claim 25, wherein said scrim has a basis weight of less than about 1 ounce per square yard.

30. An insulation blanket as defined in claim 25, wherein said scrim has a basis weight of from about 0.25 to about 0.45 ounces per square yard.

31. An insulation blanket as defined in claim 25, wherein said

polymer film is a polyester film.

32. An insulation blanket as defined in claim 25, wherein said polymer film is vapor-permeable.

33. An insulation blanket as defined in claim 25, wherein said polyester fibers are generally flame-retardant.



[illegible]

10

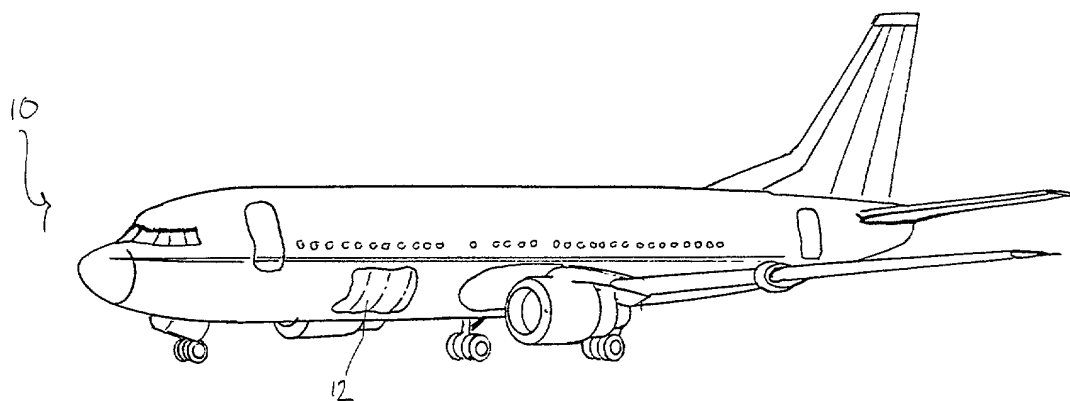


Fig. 1

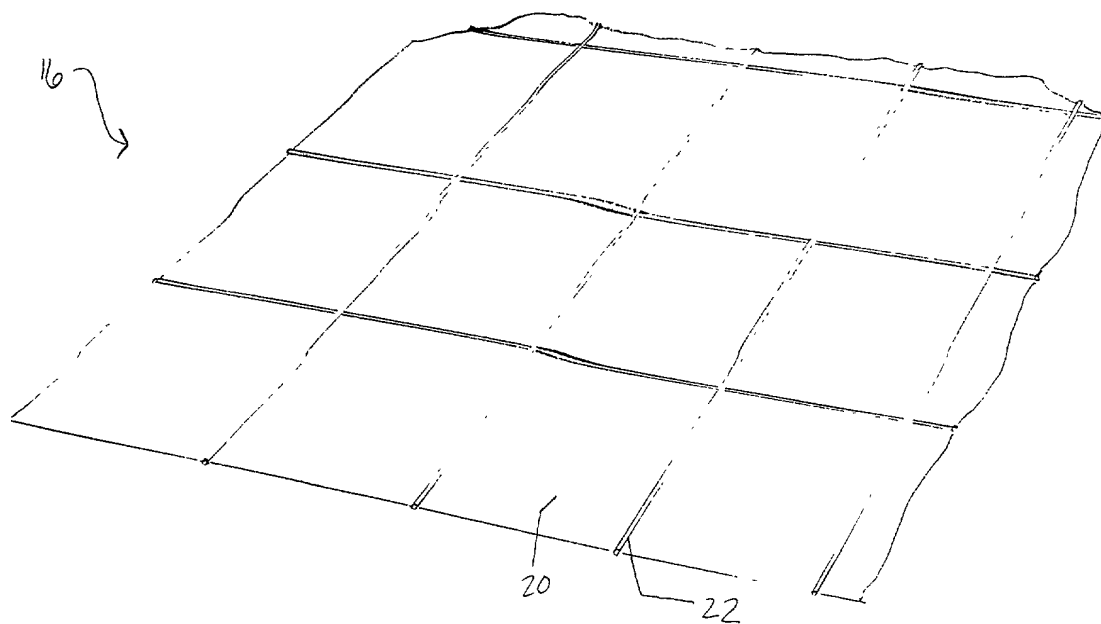


Fig. 2

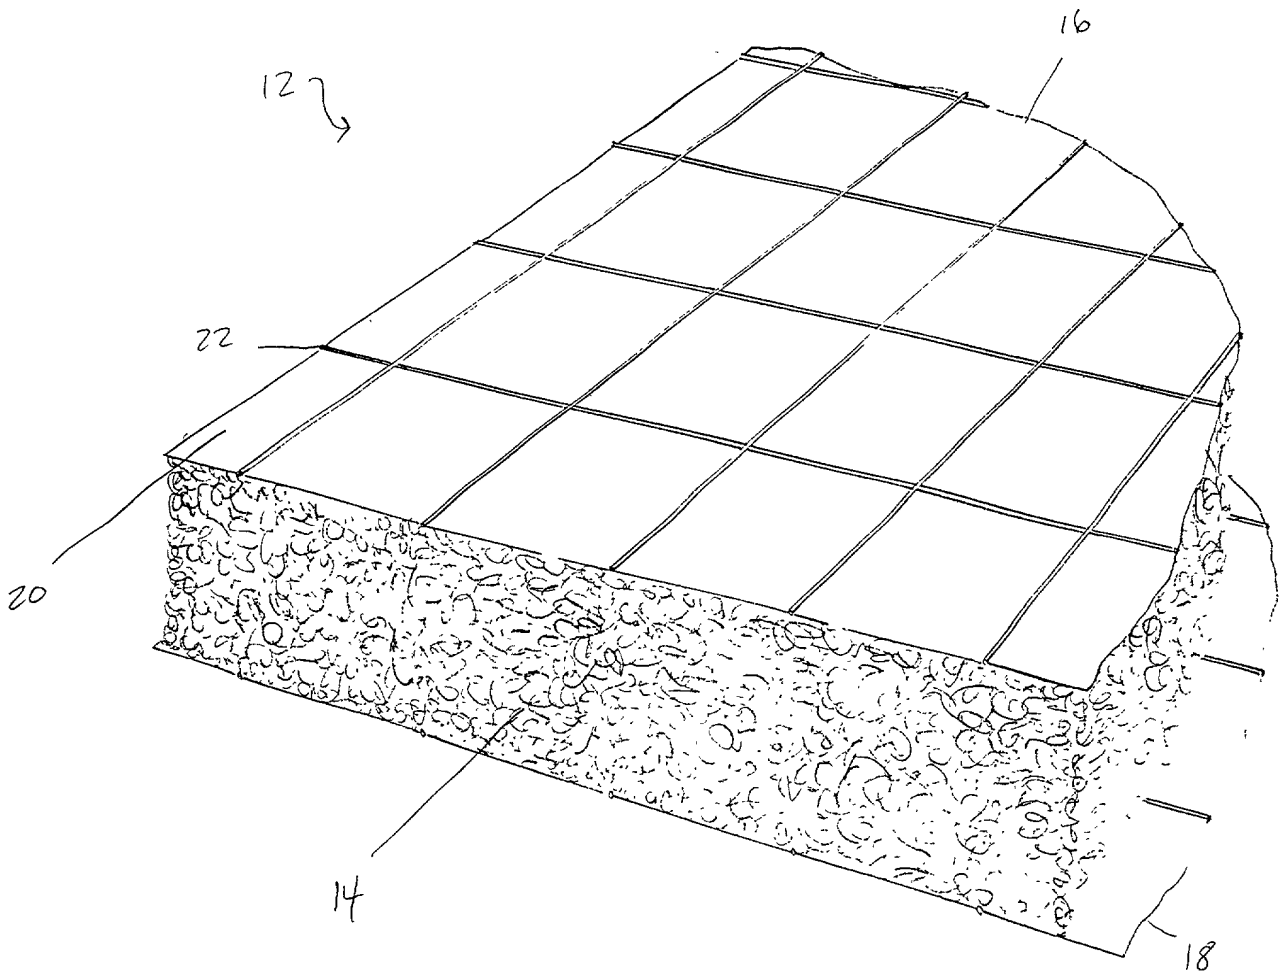


Fig. 3